

# FLEXILINE-T-RGB-DYN

# VEXICA

*Flexible outdoor led linear luminaire for direct view applications with RGB pixel control*

## LIGHT OUTPUT


LED Colour	RGB Nichia Truewhite
CRI	n/a
Luminaire Lumens	n/a
Beam Angle	110°
LED Binning	RGB Truewhite

## ELECTRICAL

Power Option	15 w/m
Input Voltage	24 V DC
Connection type	JST IP67
Maximum connected length	6m
Approx Power Consumption	10 w/m
Dimmable	YES
Max Luminaire Length	4817 mm

## PHYSICAL & ENVIRONMENTAL

Finish	White PU Resin
Length in increments of	100+17 mm
Storage Temp	-30°C to 85°C
Maximum connected length	-10°C to 50°C
IP Rating	IP67
IK Rating	03
LED Pitch	10mm
Cable Exit/Entry	End
Weight	294g / M

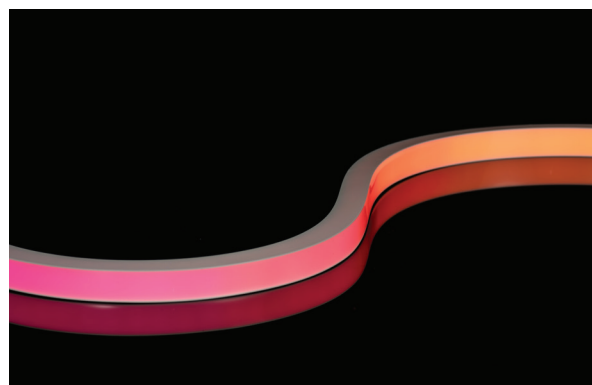


## SPECIFICATION TEXT

A unique top bending flexible LED luminaire. Manufactured in the UK using robust and resistant PU resin components for durability and flexibility. This unique product is designed to bend with the contour of a building facade, features or cove lighting detail. This product offers RGB Pixel control. Each pixel segment is 100mm long.

## PRODUCT FEATURES

- Flexible PU resin luminaire.
- Outdoor rated to IP67 rating.
- 24 input for SELV compliance.
- Pixel controlled every 100mm
- Nichia Truewhite LED type
- Connect to Vexica's Art drivers
- Uses reel to reel LED tape.
- Chamfered ends for seamless end to end lit effects.
- Homogeneous dot free look.
- Designed for pixel effects
- Fixing clips available.
- Minimum Bend radius 150mm
- Made in the UK.

## DIMENSIONS

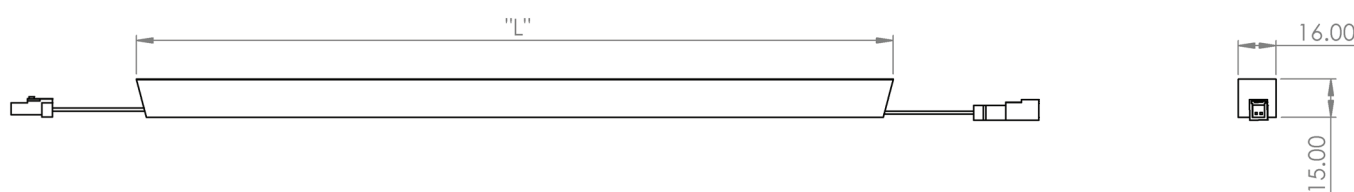

PART NUMBER: VEX-FLEXILINE-T-1017-RGB-DYN-IP67